

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
24 July 2003 (24.07.2003)


PCT

(10) International Publication Number  
**WO 03/061273 A1**

- (51) International Patent Classification<sup>7</sup>: H04N 1/333, 1/00
- (21) International Application Number: PCT/GB03/00118
- (22) International Filing Date: 14 January 2003 (14.01.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
0200797.9 15 January 2002 (15.01.2002) GB
- (71) Applicant (for all designated States except US): SUPER-  
SCAPE GROUP PLC [GB/GB]; Cromwell House, Bart-  
ley Wood Business Park, Hook, Hampshire RG27 9XA  
(GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): SALT, Bryan  
[GB/GB]; 45 Portland Street, St Albans AL3 4RA (GB).
- (74) Agent: PARABOLA; 1 Richfield Place, Richfield Av-  
enue, Reading RG1 8EQ (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: EFFICIENT IMAGE TRANSMISSION

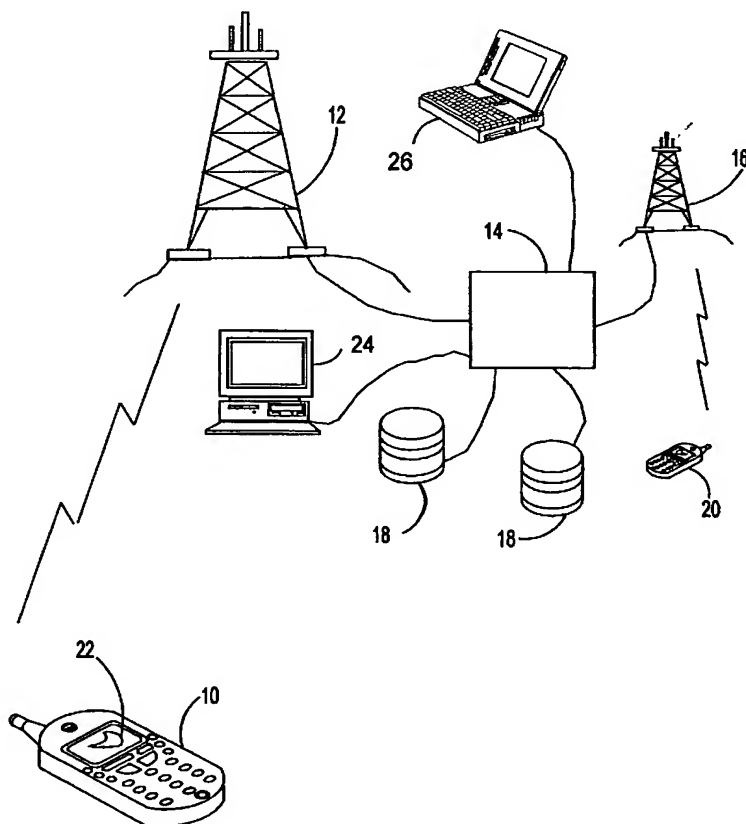

(57) Abstract: A mobile telephone (10, 20) receives, constructs and displays an image (32) from a server (18) over a mobile telephone network (12, 16, 18) where the server (18) determines the parameters for data transfer from the server (18) to the mobile telephone (10, 20), the capabilities of the mobile telephone (32) transfer task requirements, and apportions the processing between the server and the mobile telephone (10, 20) for each of a plurality of elements (28, 30, 38, 40, 42, 44, 46, 48, 50, 52, 54, 60, 62) in each image (32), thereby to meet the task requirement, which can include being within a predetermined time for task completion, or being the fastest means for task completion. Parameters for data transfer from server (18) to telephone (10, 20) include server (18) transmission bandwidth, phone (10, 20) reception bandwidth, data channel bandwidth, transmission protocol; and channel accessibility. Phone (10, 20) capabilities include the data processing speed, the available memory, display size and the data processing software available; Task requirements include the maximum time from transmission to display of the image; and the minimum display resolution of the image.

WO 03/061273 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— *with international search report*

Efficient Image Transmission

5 The present invention relates to transmission of displayable images from a source to a receiver. The invention particularly relates to such transmission where resources, such as bandwidth, time or processing power can be limited. The invention, most particularly, relates to the transmission of images which are constructed, or re-  
10 constructed, at the receiver.

Increased sophistication of, in particular, mobile telephone systems, has created a demand for ever improved images which tax the ability of the network to carry them and the processing  
15 capacity of the receiving device to display them to the required or desired resolution within the available time. The very same problem arises in the field of computer games and in the provision of Internet images. Carriage capacity depends upon instantly available bandwidth, the abilities and processing speed and  
20 capacity of the receiver, the desirable maximum time limit within which the image should be displayed and the desirable minimum resolution in the image.

As demand increases, so the instantly available bandwidth can find  
25 itself altered as more subscribers seek access to a limited resource. The present invention seeks to provide an ameliorating solution, capable of coping with such alteration, both in the short term and in the long term.

30 Different types of receiver have different reception and processing capacities. The present invention seeks to provide a system, method and apparatus capable of accommodating a wide variety of different receivers from a single transmission source.

35 Many different types of material and images can be provided for transmission. Some material, because of its size or nature, can overwhelm the capacity of the system to provide an adequate transmission service. The present invention seeks to provide a

system, method and apparatus capable of adapting to different material to allow its adequate transmission under a wide range of conditions.

5 The world does not entirely revolve around the act of image transmission and display. The receiving apparatus is required to do other things, such as computation and communication, to name but two. It is very much to the advantage of the system that the act of image transmission and display should not encroach upon the other  
10 activities of the receiving device. The present invention seeks to provide a system, method and apparatus capable of minimising the impact of image transmission and display upon the receiving apparatus, thereby freeing the receiving apparatus for other operations.

15 According to a first aspect, the present invention consists in a method for sending a processed image, comprising one or more elements, from a server to a client for display, said method comprising the steps of: determining the parameters for data  
20 transfer from the server to the client; determining the capabilities of the client; determining the task requirements; and apportioning the processing between the server and the client for each element to meet the task requirement.

25 The invention further provides that the parameters for data transfer from the server to the client can include one, all or some of the server transmission bandwidth, the client reception bandwidth, the data channel bandwidth, the transmission protocol and channel accessibility.

30 The invention further provides that the capabilities of the client can include one, all or some of the data processing speed of the client, the available memory of the client, the size of display in the client, and the data processing software available within the  
35 client.

The invention further provides that the task requirements can comprise one, all or some of the maximum time from transmission to display of the image, and the minimum display resolution of the image.

5

The invention further provides that each element be constructed for display using a selectable one of a plurality of processing options, and that the method can comprise the step of selecting an option that meets the task requirements.

10

The invention further provides that selection of the processing option can include measuring or calculating the time to execute of some or all of the plurality of options.

15

The invention further provides that the construction of an element can comprise one, all or some of: clothing a coarse mesh with a simple texture, clothing a fine mesh with a simple texture, clothing a coarse mesh with a complex texture, clothing a fine mesh with a complex texture, clothing a surface with a complex texture, clothing a surface with a simple texture, and clothing a surface with a three dimensional panel.

20

The invention further provides that the apportioning of the processing between the server and the client can include allocating the location for each action in the construction of an element.

25

The invention further provides that the determining of the capabilities of the client can include interrogation of the client by the server.

30

The invention further provides that interrogation of the client can include the client informing the server of its abilities.

The invention further provides that determining the capabilities of the client can include reference, by the server, to a list of

35

client characteristics for a plurality of different types of client.

5 The invention further provides that meeting task requirements can include falling within the minimum time to execute, or being the fastest to execute.

10 The invention further provides that the server can be a server in a mobile telephone system and that the client can be a mobile telephone device.

15 According to further aspects, the invention includes a system, a server and a client, each adapted to use the above described method.

The invention is further explained, by way of example, by the following description taken in conjunction with the appended drawings in which:

20 Fig 1 is a schematic diagram of the environment in which the present invention has its exemplary embodiment.

25 Fig 2 is an illustrative diagram of a first method, employable within the present invention, of creating a three-dimensional image using a coarse mesh and a detailed skin.

Fig 3 is a schematic diagram of a method, employable within the present invention, whereby a complex three-dimensional panel can be created using a combination of different wire meshes and textures.

30 Fig 4 illustrates how, within the invention, a scene, in this example the interior of a room, can be created using different panels and textures.

Fig 5 is a flow chart illustrating a manner in which a transmitting apparatus can send an image to a receiving apparatus.

Fig 6 is a flow chart illustrating how a transmitting apparatus can  
5 identify the nature of a receiving apparatus.

Fig 7 is a flow chart illustrating how a transmitting apparatus can  
arrive at an acceptably adequate solution for transmitting an image  
to a receiving apparatus.

10

And

Fig 8 is a flow chart illustrating how a sending apparatus can  
optimise the transmission of an image to a receiving apparatus.

15

Attention is drawn to Fig 1 showing the environment in which the  
preferred embodiment of the present invention exists.

A mobile telephone 10 is part of a communications system. The  
20 mobile telephone 10 communicates with a base station 12 which, in  
turn, is connected by wires, cables, microwave link or satellite  
to the terrestrial telephone network 14 which provides  
communication via further base stations 16 and servers 18. The  
further base stations 16 permit communication with further mobile  
25 telephones 20. The mobile telephone 10 comprises a screen 22  
whereon images can be displayed. The terrestrial telephone network  
14 can, via the Internet or by direct file transfer, act as the  
conveyance for images to be displayed on fixed 24 or portable 26  
computer equipment and on the screens 22 of mobile telephones 10,  
30 20.

The present invention is concerned with the ability of a fixed  
resource such as a computer 26, 24 or a server 18 to send an image  
to the screen 22 of a mobile telephone 10, 20.

35

Although the invention is hereinafter described with reference to displaying images on the screen 22 of a mobile telephone 10, 20, it is to be understood that the present invention also applies to any environment where an image must be sent to and displayed on a screen 22 or a receiving apparatus where resources may be limited. Such situations include direct file transfer between computers, television, and the Internet. This list is not exclusive.

Attention is drawn to Fig 2, which is a diagram illustrating one method that the present invention can use for transferring an image from a sending device to a receiving device. As will become clear from the description of the present invention, the present invention may use a range of techniques to match the properties of the data transmission channel and the receiver to allow an image to be sent to a receiver at an acceptable quality in an acceptable time, without overwhelming the receiver's processing ability. Fig 2 illustrates a first technique which can be employed.

A first action is for the transmission device to send a coarse mesh 28 to the receiving device. In the example chosen, a three dimensional image of a camera is to be sent. The coarse mesh 28 comprises a series of straight lines which define the surface of the object. In the simple coarse mesh 28 shown in figure 2, the wire frame model can be sent, typically, as a group of data comprising in the region of five kilobytes.

In order to overcome the simplicity of the coarse mesh 28, the next element to be sent is a complex texture 30. A texture is a detailed two-dimensional skin bearing images of the surface of the object. Because the coarse mesh 28 is so simple, in order to make an acceptably detailed-looking end result, a complex texture 30 is necessary. In this example, a typical complex texture 30 can be sent in a data package comprising in the region of five hundred kilobytes.



In order to create the assembled image 32, the complex texture 30 is, in the receiving apparatus, laid or stretched like a skin around the coarse mesh 28. A complete three-dimensional representation 32 of the exemplary camera is thus created and can be viewed from all angles as a complete 3D object. The complex texture 30, in this example, covers the entire surface of the coarse mesh 28.

As will become plain from the following description, a texture can be provided to cover a fractional part of a defining surface.

Depending upon the circumstances, the sending device can adopt different tactics. Unable to be illustrated in this patent application because of the restrictions on the nature of acceptable drawings imposed by the United Kingdom Patent Office, the sending device may use a complex mesh (a wire frame with great detail) in combination with one or more simple textures to achieve a similar acceptable three-dimensional image result. A complex wire frame surface-defining model may, within the present invention, comprise data of around twenty kilobytes. One or more simple textures, in the case of a representation of a radio, defining knobs, stickers, tuning scales etc, can be accommodated within five kilobytes. Within the present invention, therefore, a three-dimensional image of a radio can, if required, be transmitted from a sending apparatus to a receiving apparatus in approximately twenty kilobytes of data.

Another technique which can be used by the present invention, but which, equally, is nearly impossible to illustrate within the drawing restrictions of the United Kingdom Patent Office, uses texturing to overlay extremely complex images onto plain or simply shaped surfaces. Such a technique can be used, for example, when sending three dimensional images of the interior of the Sistine Chapel.

Attention is drawn to Fig 3, showing another technique available within the present invention.

In Fig 3 the left hand box 34 represents the activity of the transmitting device, generally known in the art as a server. Again in Fig 3, the right hand box 36 shows the activity of the receiving device, generally known in the art as a client. Fig 3 shows one way in which the transmitting device or server can distribute the various activities required in the transmission and the display of an image, to optimal effect, between the server 34 and the client 36 to accommodate the limitations of the channel bandwidth and client processing capabilities.

Fig 3 shows how secondary modelling can be used to create textures which are then applicable to meshes (wire frame models) to create complex 3D objects or, as will be shown in relation to Fig 4, panels which can be applied to defining surfaces.

In the example given in Fig 3, the first action of the server 34 is to create a complex texture, but this time employing the client 36 to do the processing. As a first step, the server 34 sends, to the client 36, a texturing frame 38. This particular texturing frame 38 can, typically, comprise no more than ten kilobytes of data, despite its fairly complex detail. The purpose of the texturing frame 38 is to provide sufficient surfaces and surface detail to create a texture, as was previously shown as item 30 in Fig 2. Along with the texturing frame 38 the server 34 also sends one or more simple textures 40, 42. The textures 40, 42 are then applied, by the client 36 to the texturing frame 38. The textures 40, 42 can, typically, in an example such as this, comprise no more than around five kilobytes of data. The simple textures 40, 42 are applied, by the client 36, to the texturing frame 38, to create a complex texture 44. As well as simply applying the simple textures 40, 42 to the texturing frame 38, the client 36 can also be instructed to apply lighting and shading operations to cause the

complex texture 44 to have an immense richness of detail. Thus, by a few simple instructions, wire frames and textures, a richly endowed complex texture 44 can be created. The complex texture 44 does, of course, reduce to an effective flat surface. That is to say that the three-dimensional detail of the texturing frame 38 is reduced to the two-dimensional surface of the complex texture 44. As will be seen, three-dimensional detail is restored.

As a second activity, the server 34 transmits, to the client 36, a simple frame outline 46. In the example given, the simple frame outline 46 can comprise as little as two kilobytes of data. The client 36 wraps the complex texture 44 onto the wire frame outline 46 to create a complex panel 48. The frame outline 46 restores the three-dimensional quality of the complex texture 44. Equally, if so desired, although requiring more complex processing on the part of the client 36, some or all of the three-dimensional detailing of the texturing frame 38 can be retained so that the complex texture 44 has at least a partial three-dimensional quality which can be added to the frame outline 46 to create yet extra three-dimensional detail. Although the end result, in this example, is a complex panel 48, where only one side needs to be visible, there is nothing, within the present invention, to stop the server 34 and the client 36 co-operating to create images such as the camera of Fig 2. The server 34 would choose a technique, such as that shown in Fig 3, where the client 36 has sufficient processing capacity of sufficient speed to create the complex panel 48 picture element within an acceptable time. In other circumstances the server 34, if the band width of the communications channel were sufficiently large, and the processing capacity of the client 36 sufficiently minuscule, might send a complete photographic image of the complex panel 48 if that is all that it could do within the allotted time. As will become plain, the essence of the present invention is flexibility and adaptability to permit image transmission, in acceptable time, over all sorts of data channels and using all manner of equipment.

Attention is drawn to Fig 4A and to Fig 4B showing another example of the present invention causing a server 34 to co-operate with a client 36 to create a final image. Fig 4A shows a room 50 as  
5 defined by a simple cuboid surface, one corner of which is visible in this view.

Fig 4B shows how the present invention can be used to create an image of the room 50, in this example a fanciful interior of a tomb  
10 or temple from an unspecified ancient civilisation.

The floor 52 and ceiling 54 of the room 50, in this example, are covered by respective first 56 and second 58 textures with a substantially flat surface. The side walls 60, in this example,  
15 are covered by complex three-dimensional panels 62, which could be created by similar techniques to those shown in Fig 3. Just by way of contrast, the end walls 64 are covered in complex texture panels 66 which can be created in a manner similar to the complex texture 44 of Fig 3 or may be simply transmitted as the complex texture 30  
20 of Fig 2, dependent upon the capacity of the data channel and the processing capacity of the client 36.

So far, the present invention has been described with reference to techniques which can be elected for the transmission and display of  
25 an image. The description now passes to explanation of the manner in which the present invention can elect which methods to employ from among those already described.

Attention is drawn to Fig 5 showing a flow chart of the manner in which the server 34 can prepare and send an image or scene to a  
30 client 36.

From start 68 a first test 70 checks to see if the server 34 already has the scene analysed. This is the probable condition  
35 since the server 34 will, most probably, be providing the client 36

with stock material such as a movie, cartoon, advert or other screen also provided to many other clients 36 on demand, and provided to the server, from an outside supplier, in a (hopefully) pre-analysed form. If, however, the scene has not already been  
5 analysed into elements, each suitable for separate transmission, a first operation 72 analyses the scene into such items as may be sent. These items or elements are stored. Control then passes to a second operation 74. If the first test 70 detected that the scene was already analysed, a third operation 76 consults the  
10 element memory and also passes control to the second operation 74.

The stored analysed scene can be stored in many ways. Each element, such as the complex panel 48 of Fig 3, can be derived using different recipes. At one extreme, a complete three-  
15 dimensional bit map can be provided. Other techniques include those shown in Fig 2 and in Fig 3, as well as those others alluded to but incapable of being illustrated under the present regime. So, when reference is made to an element, that element includes a plurality of possible recipes for its creation and display.

20 Returning to Fig 5, the fourth operation 74 gets the first element of the scene from the element memory. A fourth operation 78 then gets the parameters, from the client 36, of the receiver (client). The parameters include such items as the bandwidth of the  
25 connecting data channel, the memory capacity of the receiver, the processing clock speed of the receiver, the processing type or style of the receiver, the display type, and any other factors which will affect the manner in which an image of a scene can be sent to the client 36. In general terms, all that is necessary is  
30 for the receiver type to be indicated by an identifier so that the server 34 can recover the receiver parameters from a memory. If this is not the case, the receiver must be interrogated to discover the necessary data.

Having discovered the potentials and limitations of the communications system and the client 36, a fifth operation 80 has the server 34 seeking the fastest way to get the picture element into the receiver (client 36). If the client 36 is of a type  
5 already known, the server 34 need only look up pre-stored values to know what to do. If any feature of the client system 36 is unknown, the server 34 either calculates, or tests by doing, the amount of time required to transfer an element or group of elements to the client 36. Where a number of elements are concerned, every  
10 possible combination will be considered in case there is a solution which turns out to be faster than the others. Once a viable solution has been found, it is stored to be retrieved when required in the future.

15 Having found the fastest or an acceptably fast way to get an element into the client 36, a sixth operation 82 creates the fastest routine in the form of data and instructions to be sent to the client 36. A seventh operation 84 then adds the fastest routine to a fastest routine list which collects together the  
20 various versions of the elements to be transmitted to create the final entire scene. A second test 86 checks to see if the last element of the scene has been added to the fastest routine list. If not, an eighth operation 88 retrieves the next elements from the element memory and passes control back to the fifth operation 80  
25 for further elements to be prepared for transmission.

If the second test 86 detects that the last element of the scene has been prepared for transmission, a ninth operation 90 sends the prepared group of fastest routines to the receiver (client 36) via  
30 the data channel, together with any instructions. A third test 92 then checks to see if the group of fastest routines for that particular scene has already been stored. If it has, control passes to exit 94. If not, a tenth operation 96 stores the group of fastest routines for that particular client 36 or style of

client so that they may be retrieved for instant use on any future oc

Attention is drawn to Fig 6, a flow chart showing how the server 34 interacts with the client 36 (receiver) to determine the manner in which to send an image of a scene to the client 36. Fig 6  
5 corresponds to the fourth operation 78 of Fig 5.

From entry 98 a fourth test 100 checks to see if the receiver and its associated data channel is of a known type. If it is, an  
10 eleventh operation 102 recalls the known parameters from a type memory and exits the routine at exit 104. If the fourth test 100 detects that the receiver and its data channel is of an unknown type, a twelfth operation 106 has the server 34 call the client 36 (receiver) and interrogate it to get the necessary details. A  
15 thirteenth operation 108 determines the limiting bandwidth of the data channel and/or of the receiver. A fourteenth operation 110 has the server 34 being informed of the processing type and speed of the receiver. A fifteenth operation 112 has the server 34 informed of the memory capacity of the client 36. A sixteenth  
20 operation 114 has the server 34 informed of the types of program or image display/ processing/reconstruction programs or software contained within the client 36. A seventeenth operation 116 has the server 34 informed of the type identifier of the receiver (client 36). An eighteenth operation 118 then has the server 34  
25 store the client 36 (receiver) parameters so that they can be instantly retrieved when next that or a similar receiver is encountered.

Attention is drawn to Fig 7, a flow chart illustrating one way in which the server 34 can execute the fifth operation 80 of Fig 5 where the fastest way to get an element of the scene into the receiver or server 36 is found.  
30

From entry 120 a nineteenth operation 122 retrieves the available  
35 resources from the element memories that are associated with the

particular selected element. These can include such items as complete three-dimensional bitmaps, wire frames, textures, texture frames and any other part which can be used, and happens to be available, for creating the selected element of the image. Thus,  
5 the server 34 has awareness of the parts which it has to hand to create the selected element of the scene.

A twentieth operation 124 then either receives, or retrieves from store, the task requirements. Task requirements can include, but  
10 are not limited to, maximum time for execution, minimum resolution on the image on the screen 22, and so on.

Having determined what resources and minimum requirements exist, a twenty-first operation 126 puts together the first possible group  
15 of resources capable of sending the selected picture element to and displaying the selected picture element at the client 36. A twenty-second operation 128 then tests the time to execute the transmission and display of the selected picture element. As earlier described, this can be done by numerical calculation, by  
20 adopting the same memory capacity, processing software and processing style as the client 36 and actually measuring how long was taken to execute, or by a combination of the two methods.

Having tested the time of execution in the twenty-second operation  
25 128, a fifth test 130 checks to see if the execution time falls within the task requirements set out in the twentieth operation 124. If that method falls within the task requirements, a twenty-third operation 132 elects that method to be used and the routine proceeds to exit 134.

30

If the fifth test 130 determines that the particular set of possible resources has not fallen within the task requirements as defined by the twentieth operation 124, a twenty-fourth operation 136 gets the next set of possible resources capable of transmitting  
35 and displaying the selected element of the image, and returns



control to the twenty-second operation 128 where the time to execute is measured.

If, after testing the time to execute of all possible sets of resources, no set has been found which falls within the task requirements, the server 34 can select the set of resources which takes the least time, or alternatively, can signal to the client 36 (receiver) that task requirements cannot be met.

Finally, attention is drawn to Fig 8, a flow chart showing essentially the same function as Fig 7, but where the fastest rather than the first acceptable routine within the task requirements is selected. Fig 7 can be used where there is a pressing urgency to provide an image to a client 36 of unknown type. Fig 8 can be used, at leisure, where the server 34 can find the fastest way to provide an image of a scene to a client 36. Like numbers denote like elements. All elements are the same, as in Fig 7, until what would have been the fifth test 130 which is replaced by a sixth test 138 which looks to see if the execution time discovered on the twenty-second operation 128 is less than a stored value. If it is not, that particular set of possible resources is simply discarded, a seventh test 140 checks to see if it is the last possible combination, and the twenty-fourth operation 136 gets the next set of possible resources for the twenty-second operation 128 if it is not.

If the sixth test detects that the execution time is less than the stored value, a twenty-fifth operation 142 discards the old stored value and method and, in its place, stores the currently tested set of possible resources and the execution time. The twenty-fifth operation 142 therefore keeps a running records of what has, so far, been found to be the fastest method. When the seventh test 140 detects that the last combination has been detected, a twenty-sixth operation 144 selects the stored method as the one to use.

The present invention has been described with reference to a limited number of exemplary image transmission, reconstruction and display methods. It is to be appreciated that the present invention applies to any situation where image material can be sent  
5 from a source to a receiver via a data transmission resource and can be reconstructed for display.

**CLAIMS**

1. A method for sending a processed image, comprising one or more elements, from a server to a client for construction and display, said method comprising the steps of: determining the parameters for data transfer from the server to the client; determining the capabilities of the client; determining the task requirements; and apportioning the processing between the server and the client for each element to meet the task requirement.
2. A method, according to claim 1, wherein said parameters for data transfer from said server to said client include one, all or some of: the transmission bandwidth of said server; the reception bandwidth of said client; the bandwidth of said data channel; the transmission protocol employed between said server and said client; and the accessibility of the channel employed between said server and said client.
3. A method, according to claim 1 or claim 2, wherein said capabilities of said client include one, all or some of: the data processing speed of said client; the available memory of said client; the size of display in said client; and the data processing software available within said client.
4. An method, according to any one of the preceding claims, wherein said task requirements comprise one, all or some of: the maximum time from transmission to display of the image; and the minimum display resolution of the image.
5. A method, according to any one of the preceding claims, wherein each element can be constructed for display using a selectable one of a plurality of processing options, said method

including the step of selecting an option that meets the task requirements.

6. A method, according to claim 5, wherein said step of selecting said processing option includes the step of measuring or calculating the time to execute of some or all of the plurality of options.

7. A method, according to any one of the preceding claims, wherein said construction of an element can comprise one, all or some of: clothing a coarse mesh with a simple texture; clothing a fine mesh with a simple texture; clothing a coarse mesh with a complex texture; clothing a fine mesh with a complex texture; clothing a surface with a complex texture; clothing a surface with a simple texture; and clothing a surface with a three dimensional panel.

8. A method, according to any one of the preceding claims, wherein said apportioning of the processing between said server and said client includes the step of allocating the location for each action in the construction of an element.

9. A method, according to any one of the preceding claims, wherein said determining of said capabilities of said client includes the step of interrogation of said client by said server.

10. A method, according to claim 9, wherein said interrogation of said client includes said client informing said server of said client's abilities.

11. A method, according to any one of the preceding claims, wherein said determining of said capabilities of said client can include reference, by said server, to a list of client characteristics for a plurality of different types of client.

12. A method, according to any one of the preceding claims, wherein said meeting of task requirements includes: falling within the minimum time to execute; and being the fastest to execute.

13. A method, according to any one of the preceding claims, wherein said server is a server in a mobile telephone system, and said client is a mobile telephone device.

14. A system, operative to send a processed image, comprising one or more elements, said system comprising: a server, operative to send the image; a client, operative to receive, construct and display the image; parameter determination means, operative to determine the parameters for data transfer from said server to said client; capability determination means, operative to determine the capability of said client; task requirements determination means, operative to determine the task requirement; and processing apportioning means, operative to apportion the processing between said server and said client for each element to meet said task requirement.

15. A system, according to claim 14, wherein said parameters for data transfer from said server to said client include one, all or some of: the transmission bandwidth of said server; the reception bandwidth of said client; the bandwidth of said data channel; the transmission protocol employed between said server and said client; and the accessibility of the channel employed between said server and said client.

16. A system, according to claim 14 or claim 15, wherein said capabilities of said client include one, all or some of: the data processing speed of said client; the available memory of said client; the size of display in said client; and the data processing software available within said client.

17. A system, according to any one of claims 14 to 16, wherein said task requirements comprise one, all or some of: the maximum time from transmission to display of the image; and the minimum display resolution of the image.

18. A system, according to any one of claims 14 to 18, wherein each element can be constructed for display using a selectable one of a plurality of processing options, said system including selection means, operative to select an option that meets the task requirements.

19. A system, according to claim 18, wherein said selection means is operative to measure or calculate the time to execute of some or all of the plurality of options.

20. A system, according to any one of claims 14 to 19, wherein said construction of an element comprises one, all or some of: clothing a coarse mesh with a simple texture; clothing a fine mesh with a simple texture; clothing a coarse mesh with a complex texture; clothing a fine mesh with a complex texture; clothing a surface with a complex texture; clothing a surface with a simple texture; and clothing a surface with a three dimensional panel.

21. A system, according to any one of claims 14 to 20, wherein said process apportioning means includes means to allocate the location for each action in the construction of an element.

22. A system, according to any one of claims 14 to 21, wherein said capability determination means is operative to interrogate said client from said server.

23. A system, according to claim 22, wherein said interrogation of said client includes said client informing said server of said client's abilities.

24. A system, according to any one of claims 14 to 23, wherein said capability determination means is operative to cause said server to reference a list of client characteristics for a plurality of different types of client.

25. A system, according to any one of claims 14 to 24, wherein said meeting of task requirements includes: falling within the minimum time to execute; and being the fastest to execute.

26. A system, according to any one of claims 14 to 25, wherein said server is a server in a mobile telephone system, and said client is a mobile telephone device.

27. A server, operative to send a processed image, comprising one or more elements, to a client, operative to receive, construct and display the image said server comprising: parameter determination means, operative to determine the parameters for data transfer from said server to said client; capability determination means, operative to determine the capability of said client; task requirements determination means, operative to determine the task requirement; and processing apportioning means, operative to apportion the processing between said server and said client for each element to meet said task requirement.

28. A server, according to claim 27, wherein said parameters for data transfer from said server to said client include one, all or some of: the transmission bandwidth of said server; the reception bandwidth of said client; the bandwidth of said data channel; the transmission protocol employed between said server and said client; and the accessibility of the channel employed between said server and said client.

29. A server, according to claim 27 or claim 28, wherein said capabilities of said client include one, all or some of: the data

processing speed of said client; the available memory of said client; the size of display in said client; and the data processing software available within said client.

30. A server, according to any one of claims 27 to 29, wherein said task requirements comprise one, all or some of: the maximum time from transmission to display of the image; and the minimum display resolution of the image.

31. A server, according to any one of claims 27 to 30, wherein each element can be constructed for display using a selectable one of a plurality of processing options, said server comprising including selection means, operative to select an option that meets the task requirements.

32. A server, according to claim 31, wherein said selection means is operative to measure or calculate the time to execute of some or all of the plurality of options.

33. A server, according to any one of claims 27 to 32, for use where said construction of an element comprises one, all or some of: clothing a coarse mesh with a simple texture; clothing a fine mesh with a simple texture; clothing a coarse mesh with a complex texture; clothing a fine mesh with a complex texture; clothing a surface with a complex texture; clothing a surface with a simple texture; and clothing a surface with a three dimensional panel.

34. A server, according to any one of claims 27 to 33, wherein said process apportioning means includes means to allocate the location for each action in the construction of an element.

35. A server, according to any one of claims 27 to 34, wherein said capability determination means is operative to interrogate said client from said server.



36. A server, according to claim 35, wherein said interrogation of said client includes said client informing said server of said client's abilities.

37. A server, according to any one of claims 27 to 36, wherein said capability determination means is operative to cause said server to reference a list of client characteristics for a plurality of different types of client.

38. A server, according to any one of claims 27 to 37, wherein said meeting of task requirements includes: falling within the minimum time to execute; and being the fastest to execute.

39. A server, according to any one of claims 27 to 38, wherein said server is a server in a mobile telephone system, and said client is a mobile telephone device.

40. A client, operative to receive, construct and display a processed image, comprising one or more elements, sent from a server, said client comprising; means to co-operate with parameter determination means, operative to determine the parameters for data transfer from said server to said client; means to co-operate with capability determination means, operative to determine the capability of said client; means to co-operate with task requirements determination means, operative to determine the task requirement; and means to co-operate with processing apportioning means, operative to apportion the processing between said server and said client for each element to meet said task requirement.

41. A client, according to claim 40, wherein said parameters for data transfer from said server to said client include one, all or some of: the transmission bandwidth of said server; the reception bandwidth of said client; the bandwidth of said data channel; the transmission protocol employed between said server and

said client; and the accessibility of the channel employed between said server and said client.

42. A client, according to claim 40 or claim 41, wherein said capabilities of said client include one, all or some of: the data processing speed of said client; the available memory of said client; the size of display in said client; and the data processing software available within said client.

43. A client, according to any one of claims 40 to 42, wherein said task requirements comprise one, all or some of: the maximum time from transmission to display of the image; and the minimum display resolution of the image.

44. A client, according to any one of claims 40 to 43, wherein each element can be constructed for display using a selectable one of a plurality of processing options, said client being co-operative with selection means, operative to select an option that meets the task requirements.

45. A client, according to any one of claims 40 to 44, for use where said construction of an element comprises one, all or some of: clothing a coarse mesh with a simple texture; clothing a fine mesh with a simple texture; clothing a coarse mesh with a complex texture; clothing a fine mesh with a complex texture; clothing a surface with a complex texture; clothing a surface with a simple texture; and clothing a surface with a three dimensional panel.

46. A client, according to any one of claims 40 to 45, wherein said process apportioning means includes means to allocate the location for each action in the construction of an element.


47. A client, according to any one of claims 40 to 46, wherein said capability determination means is operative to interrogate said client from said server.


48. A client, according to claim 47, wherein said interrogation of said client includes said client informing said server of said client's abilities.

49. A client, according to any one of claims 40 to 47, wherein said capability determination means is operative to cause said server to reference a list of client characteristics for a plurality of different types of client.


50. A client, according to any one of claims 40 to 49, wherein said meeting of task requirements includes: falling within the minimum time to execute; and being the fastest to execute.

51. A client, according to any one of claims 27 to 38, wherein said server is a server in a mobile telephone system, and said client is a mobile telephone device.

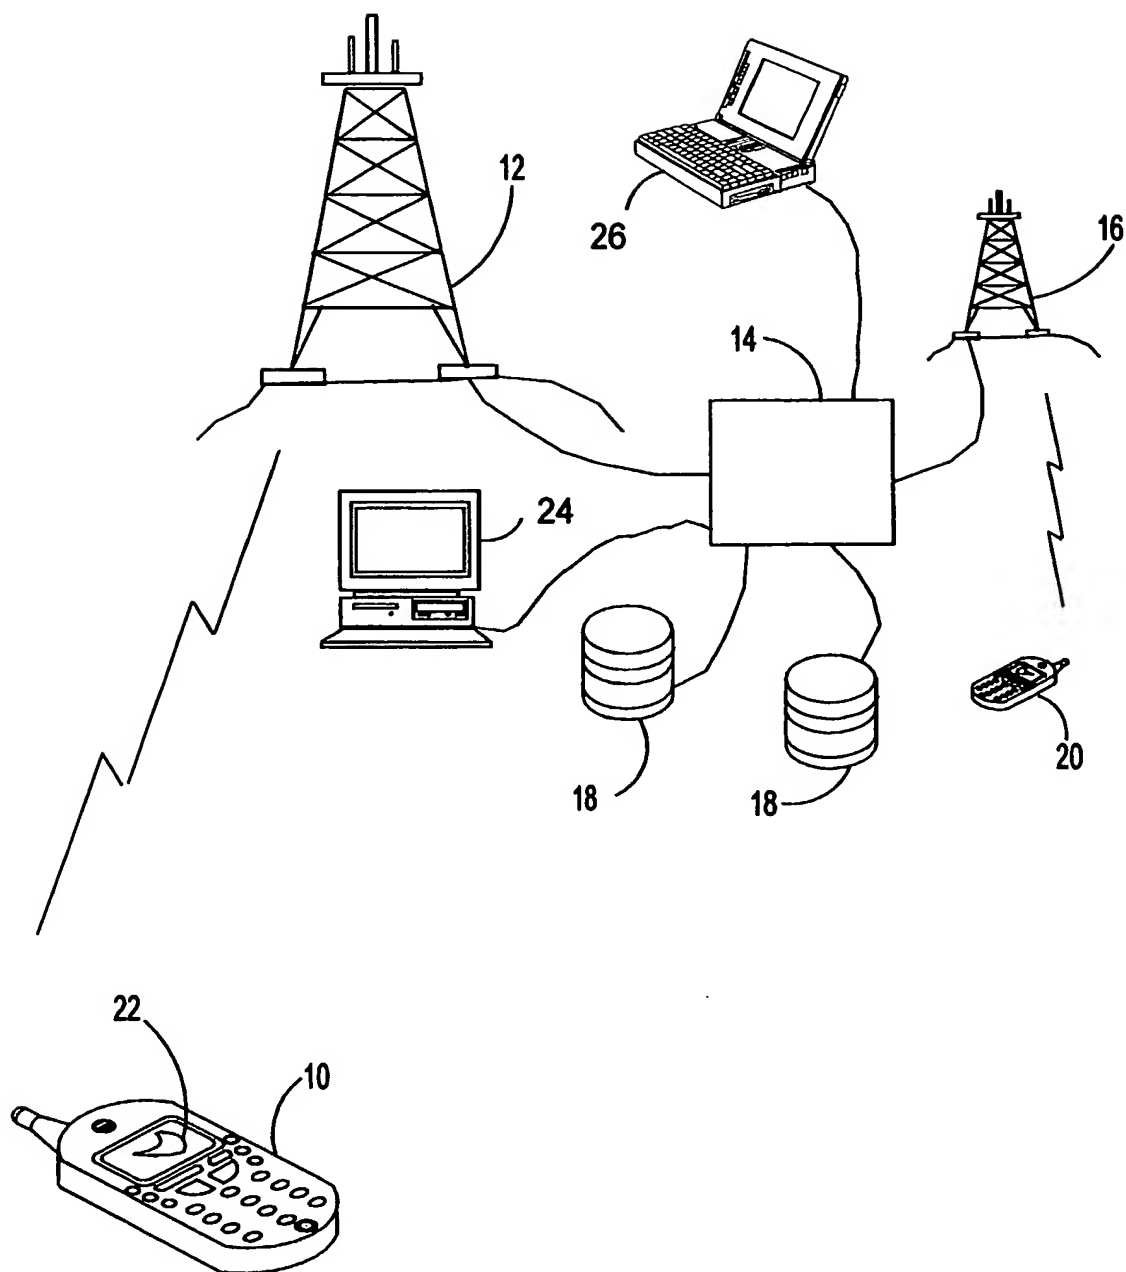
**FIGURE 1**

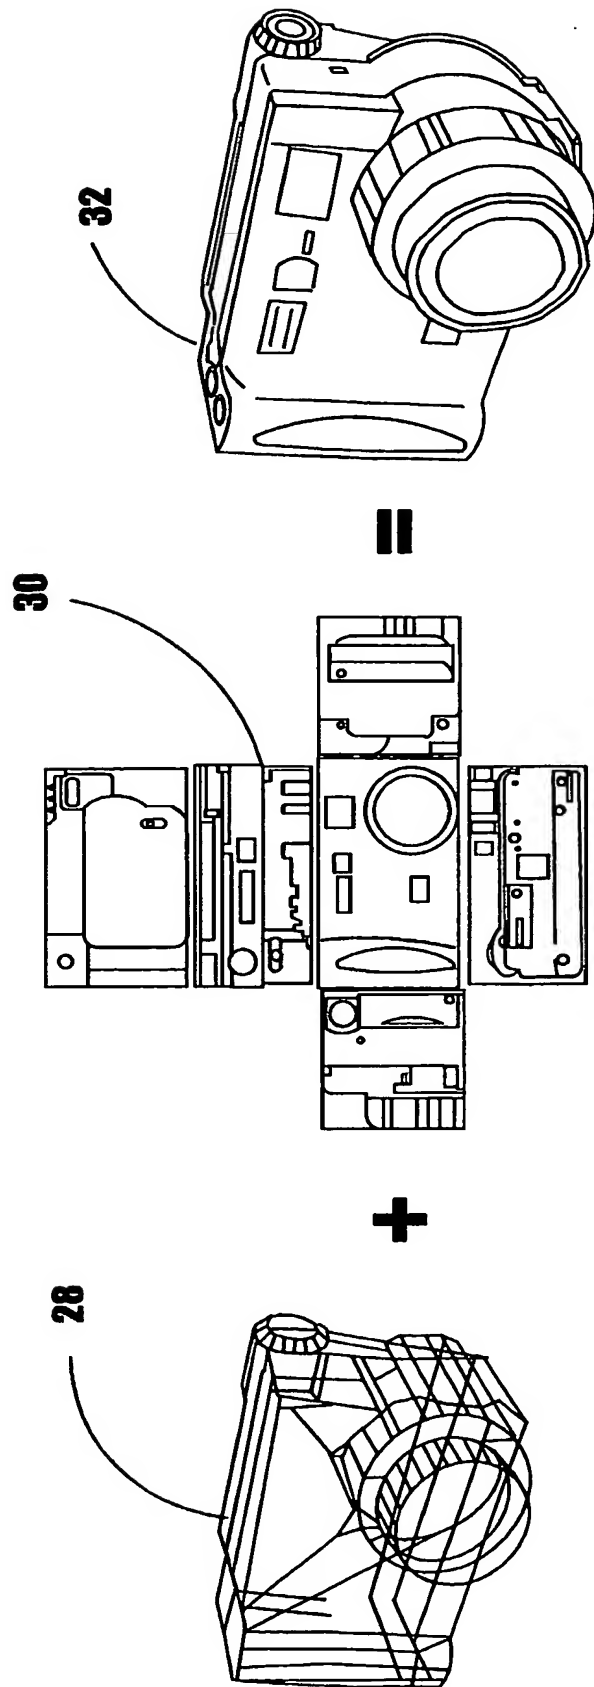


**FIGURE 2**

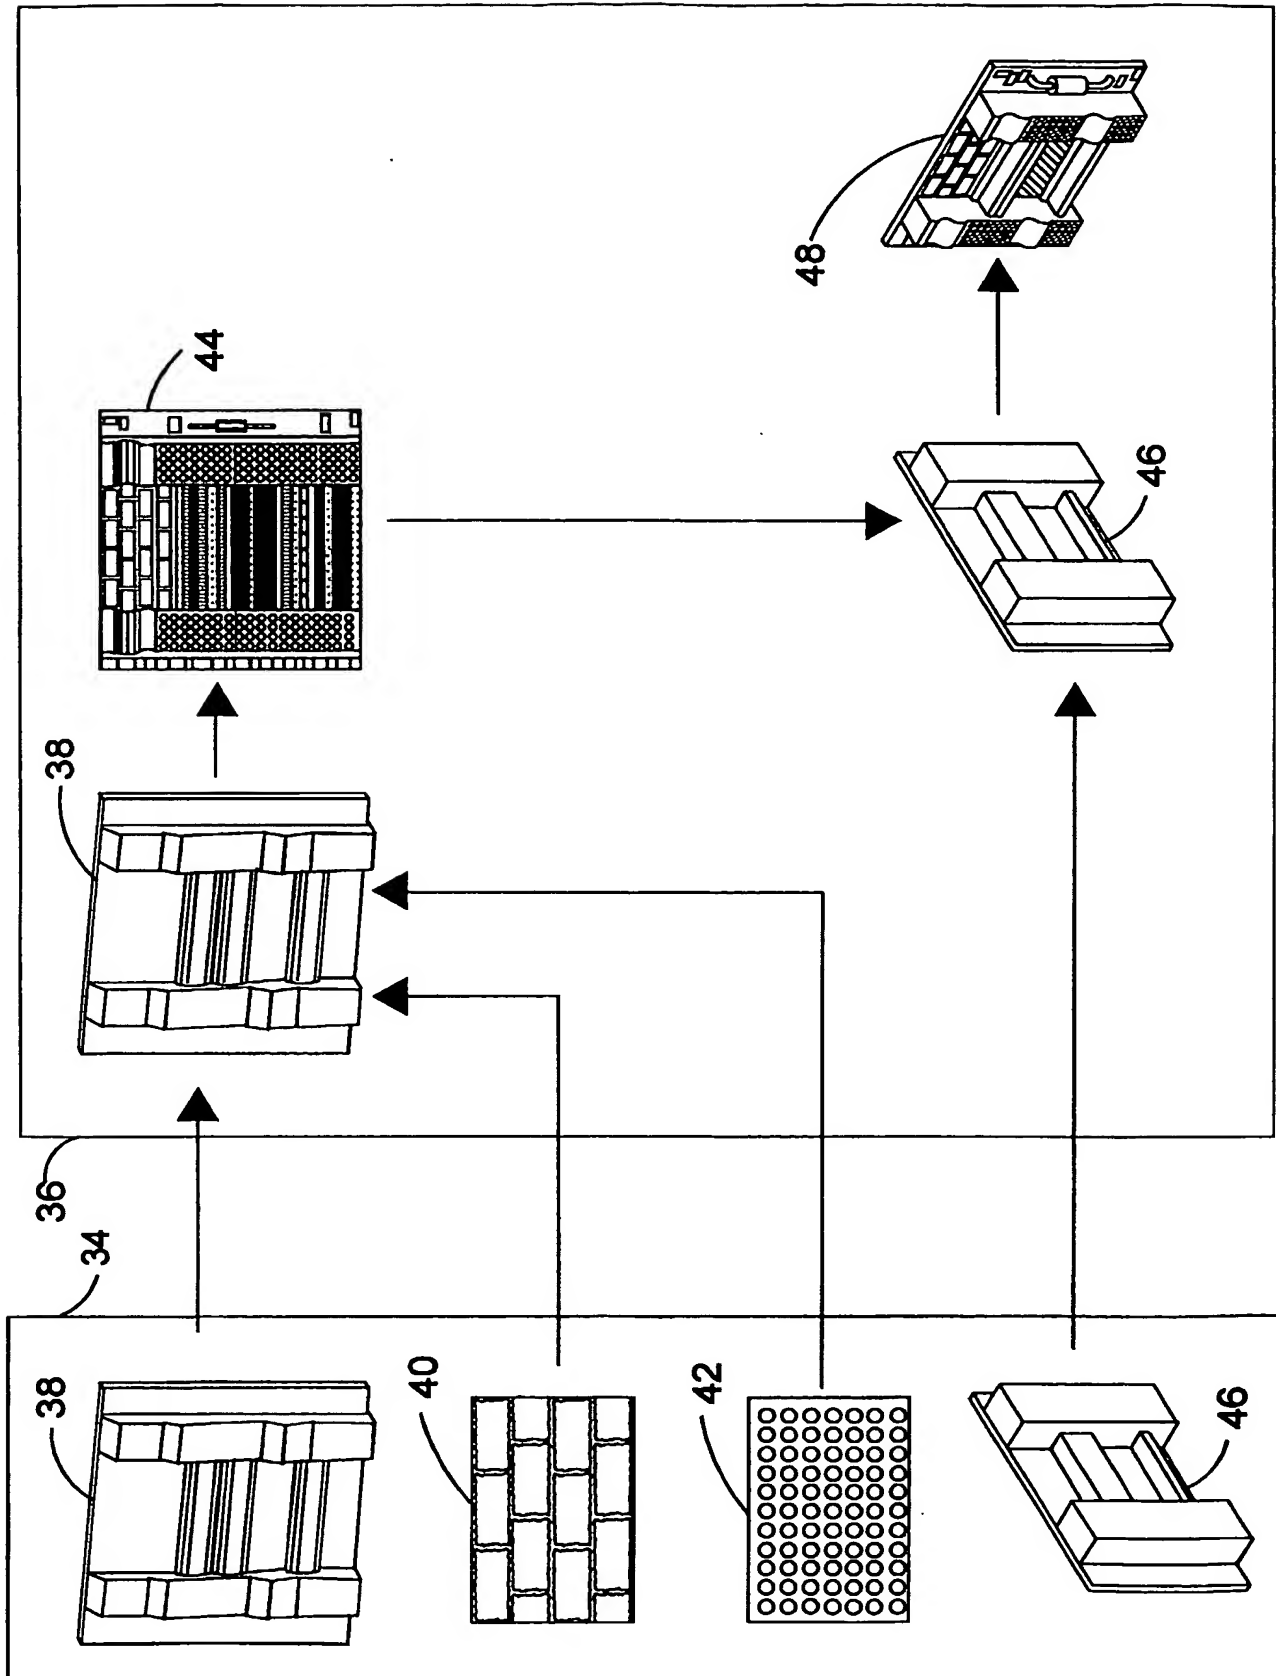


**FIGURE 3**

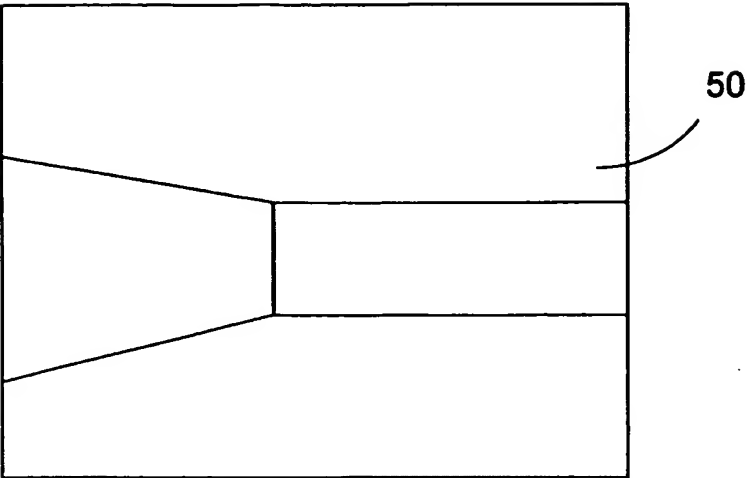



**FIGURE 4A**

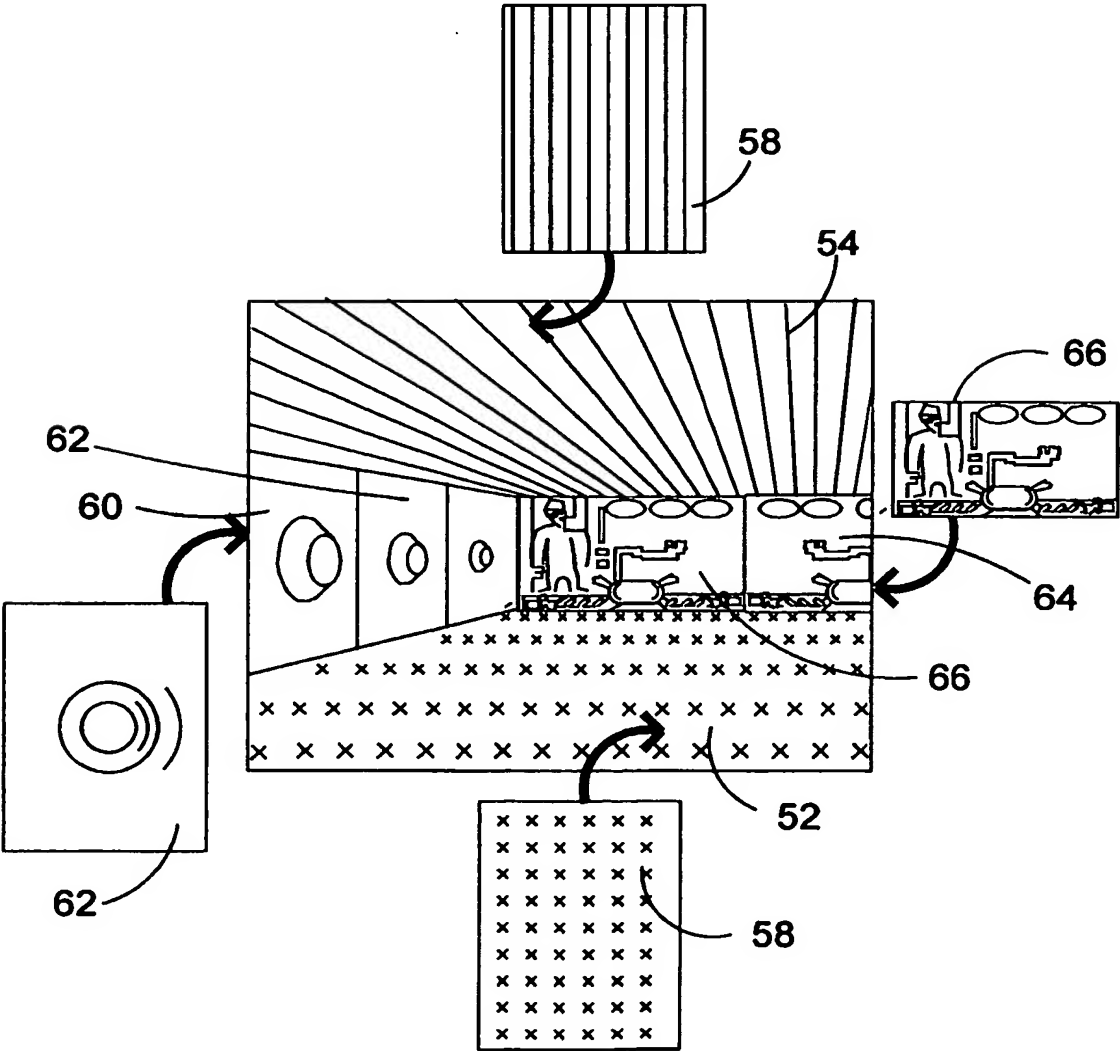


**FIGURE 4B**

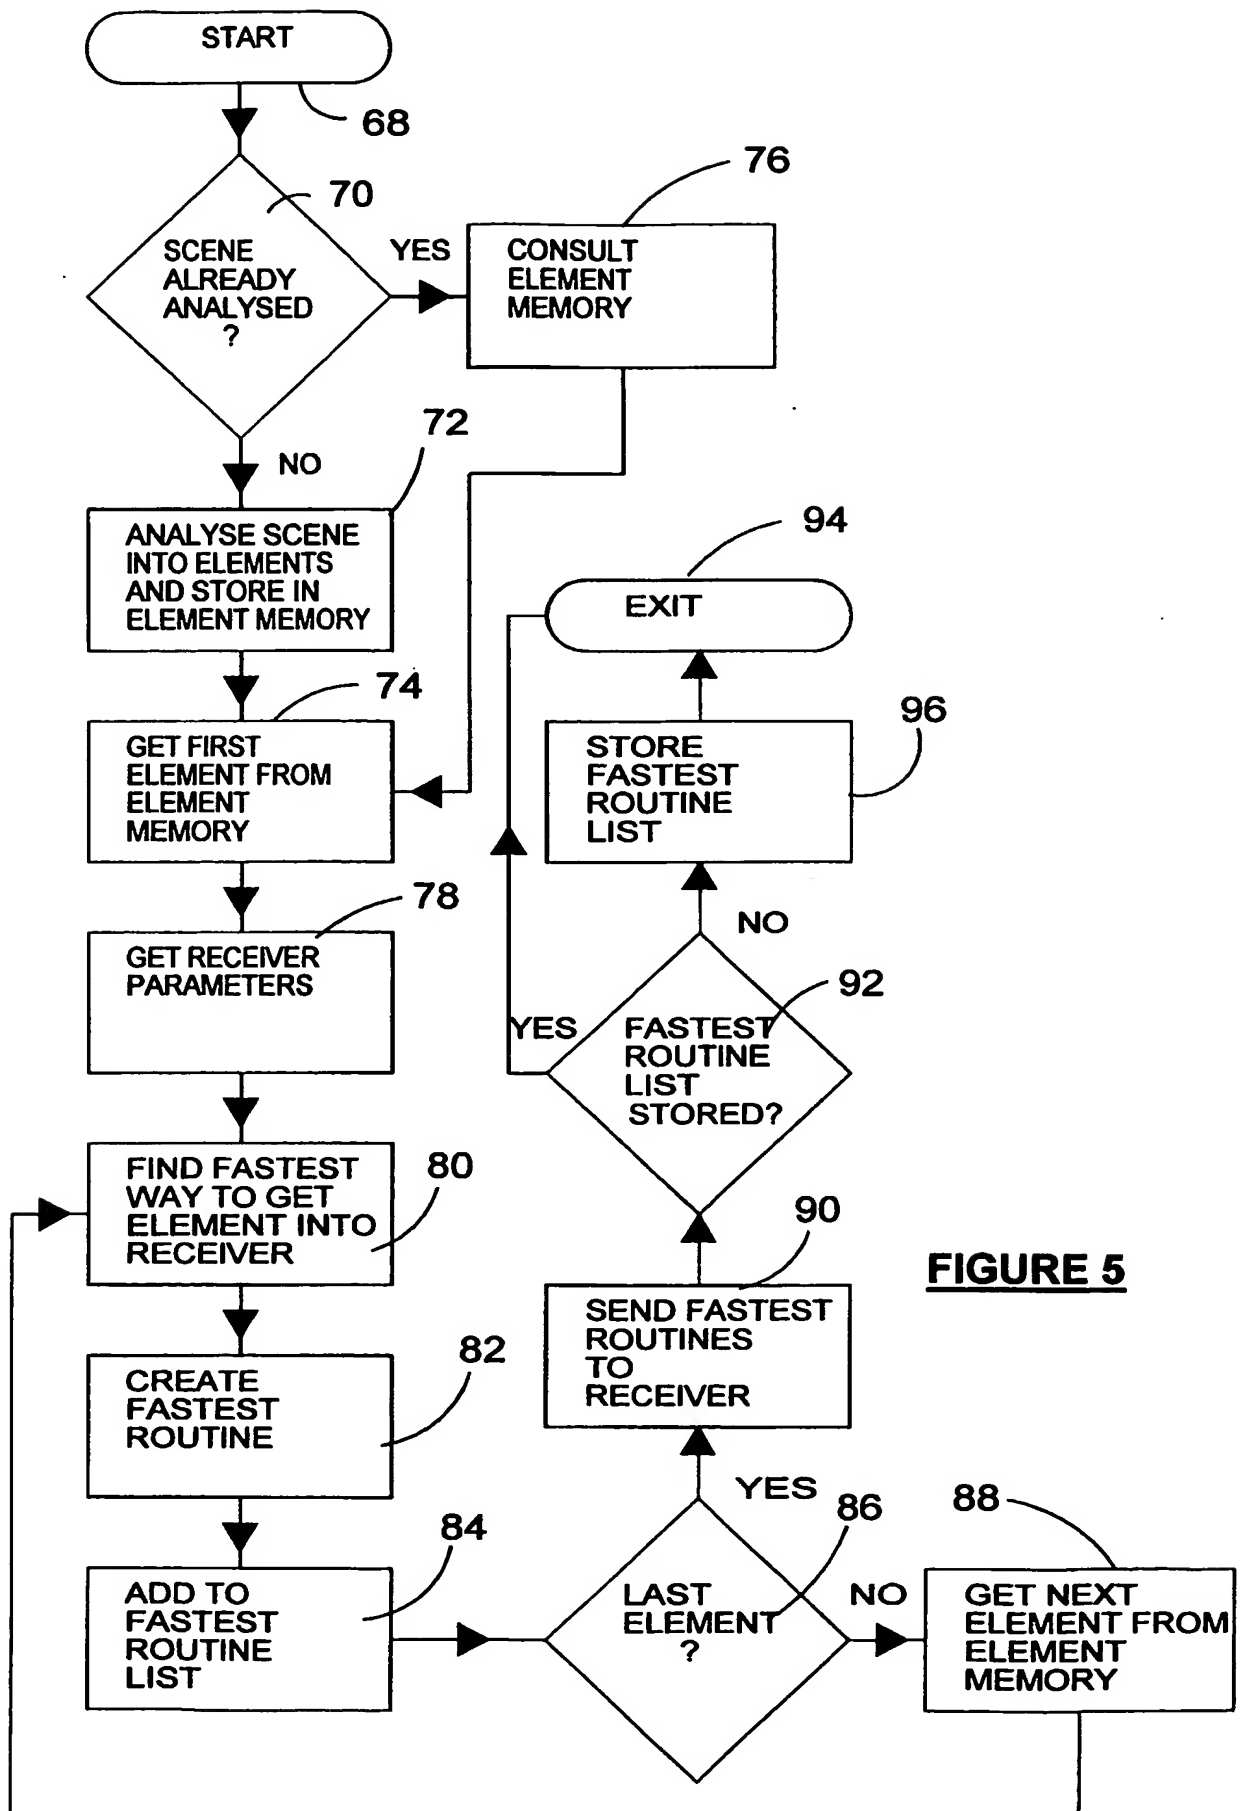**FIGURE 5**

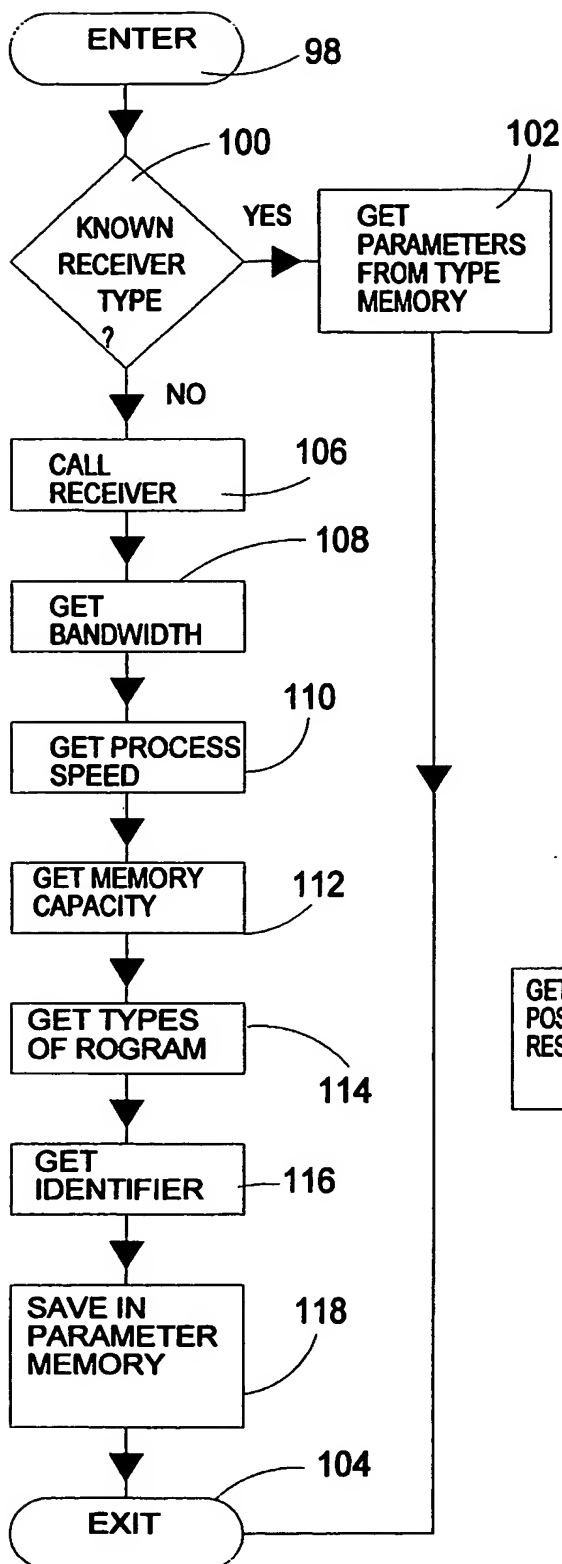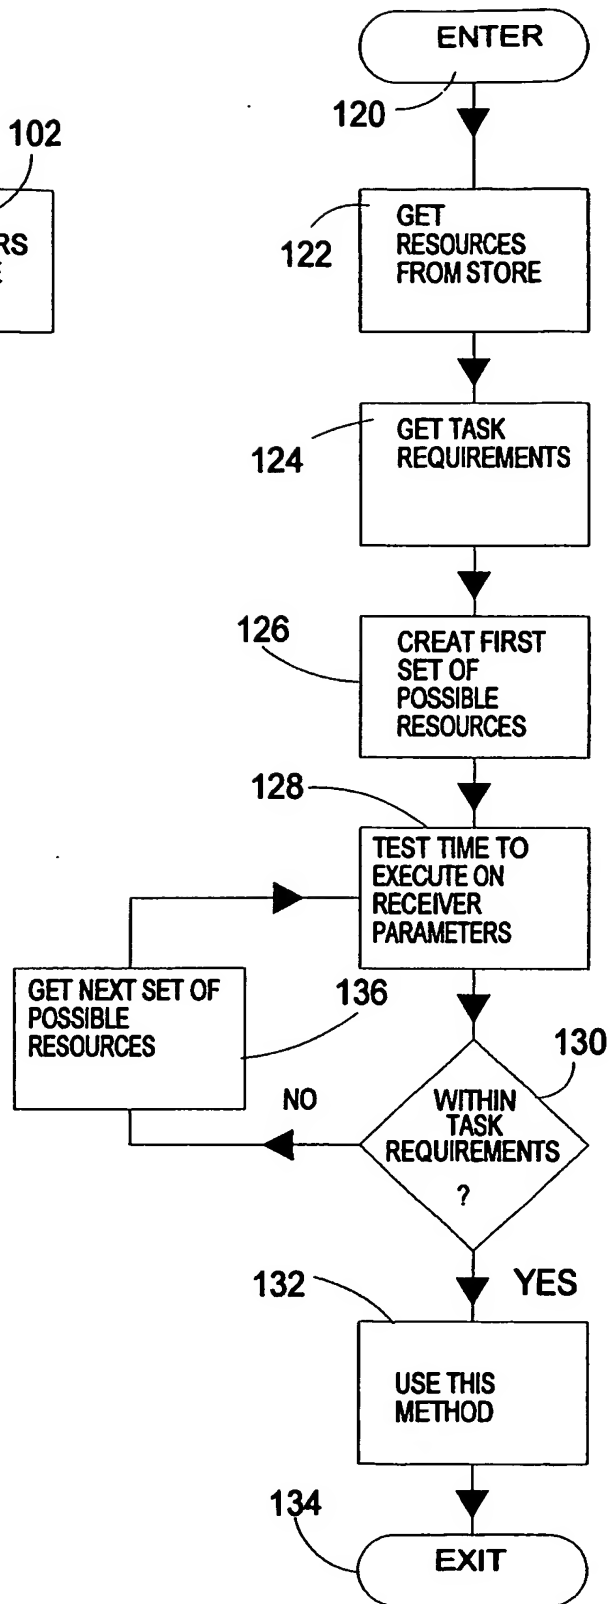

**FIGURE 6****FIGURE 7**

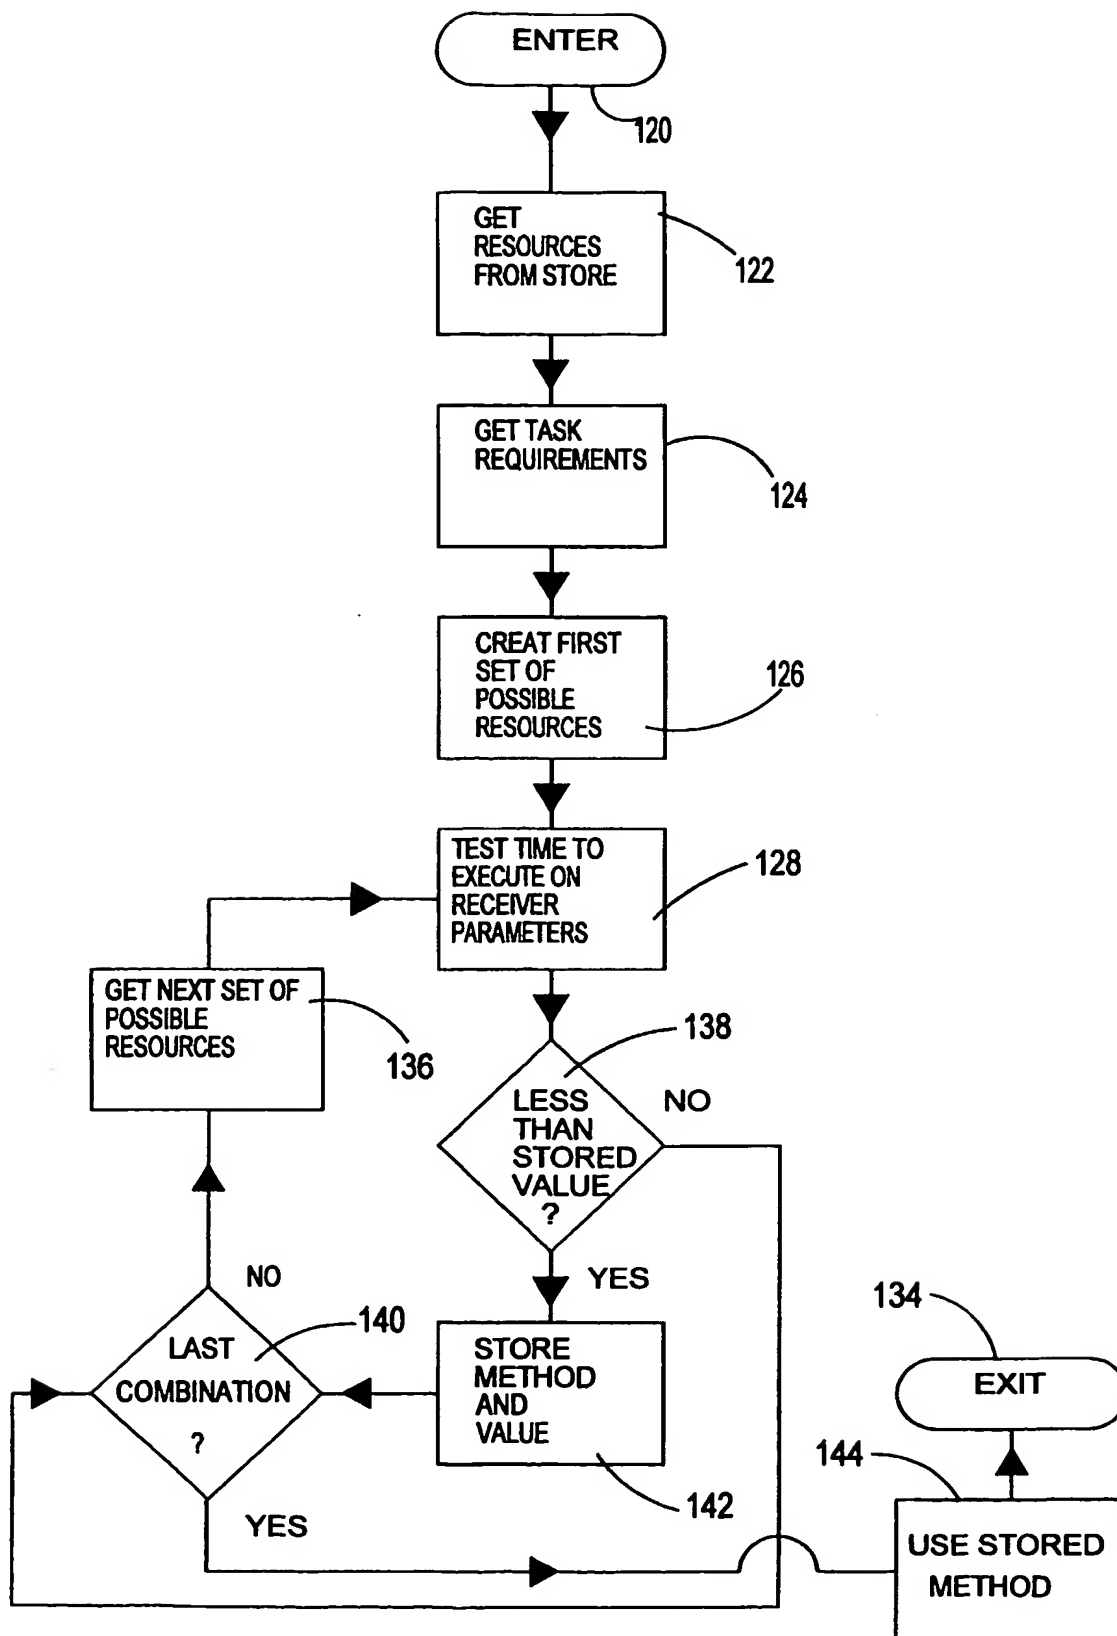**FIGURE 8**

# INTERNATIONAL SEARCH REPORT

International Publication No

PCT/GB 03/00118

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 H04N1/333 H04N1/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G06F H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 684 604 A (SHOJI FUMIO ET AL) 4 November 1997 (1997-11-04) column 3, line 60 -column 11, line 47 ---	1,14,27, 40
X	EP 0 652 668 A (MICROSOFT CORP) 10 May 1995 (1995-05-10) the whole document ---	1,14,27, 40
A	WO 01 93562 A (BANDAI CO ;ISHII FUJIO (JP); TOBITA NAOMI (JP)) 6 December 2001 (2001-12-06) abstract ---	1-51
A	EP 1 058 419 A (CANON EUROPA NV) 6 December 2000 (2000-12-06) abstract --- -/--	1-51

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

4 April 2003

Date of mailing of the international search report

14/04/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Waern, G

# INTERNATIONAL SEARCH REPORT

Internat Application No

PCT/GB 03/00118

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2001/034783 A1 (KITAMURA YOSHIMASA) 25 October 2001 (2001-10-25) page 2, paragraphs 28-39 -----	1-51
A	US 5 805 301 A (RÄSÄNEN) 8 September 1998 (1998-09-08) abstract -----	1-51

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/GB 03/00118

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5684604	A	04-11-1997	JP 3126484 B2	22-01-2001
			JP 5308527 A	19-11-1993
			JP 5344344 A	24-12-1993
			JP 3308600 B2	29-07-2002
			JP 6098148 A	08-04-1994
EP 0652668	A	10-05-1995	CA 2134620 A1	06-05-1995
			EP 0652668 A2	10-05-1995
			JP 7203177 A	04-08-1995
			US 5621894 A	15-04-1997
WO 0193562	A	06-12-2001	WO 0193562 A1	06-12-2001
			AU 4783300 A	11-12-2001
			EP 1292094 A1	12-03-2003
EP 1058419	A	06-12-2000	FR 2794320 A1	01-12-2000
			FR 2794321 A1	01-12-2000
			FR 2794326 A1	01-12-2000
			EP 1058419 A2	06-12-2000
US 2001034783	A1	25-10-2001	JP 2001306467 A	02-11-2001
			FI 20010796 A	20-10-2001
US 5805301	A	08-09-1998	FI 951020 A	07-09-1996
			AT 205033 T	15-09-2001
			AU 702866 B2	11-03-1999
			AU 4833496 A	23-09-1996
			CA 2188788 A1	12-09-1996
			CN 1168211 A , B	17-12-1997
			DE 69614791 D1	04-10-2001
			DE 69614791 T2	23-05-2002
			DK 759247 T3	08-10-2001
			EP 0759247 A1	26-02-1997
			ES 2160802 T3	16-11-2001
			WO 9627975 A1	12-09-1996
			HK 1000062 A1	03-05-2002
			JP 10500275 T	06-01-1998
			NO 964687 A	05-11-1996